


PSANA 6200

Trace nitrogen analyzer

Trace Nitrogen in Argon, Helium and Crude Argon analyzer

PSANA 6200 is the new standard for trace Nitrogen. Its unique design brings reliability and accuracy needed for such measurement. Its own Plasma Emission Detector System extends the lifetime of the cell. This Duty Cycle Controlled System has the property to decrease contamination and coating inside the plasma cell giving a more efficient, reliable and accurate analyzer. Modular instrument, parts can be changed on site easily including the detector.

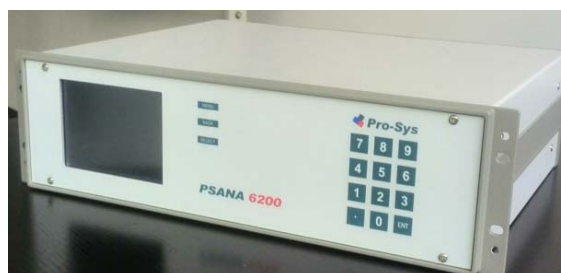

FEATURES:

- Unique Plasma Emission Detector design based on a Duty Cycle Controlled System.
- Bootloader integrated for software update via Ethernet
- Large scale measurement
- 4-20 mA output as standard
- Range Identification Relay
- Maintenance free
- LAN/Web control
- Micro-valve for low dead volume and fast purging time
- Low sample consumption
- 3U cabinet
- Optional zero gas calibration free system

APPLICATIONS:

- Air separation unit
- Quality control for truck fills and gas cylinders
- Cryogenic truck loading station
- Speciality gas laboratories
- Process control
- Argon purification plant
- Steel Industries
- Chemical plants
- Welding gas control
- Helium liquification plants
- Gas management system
- Semiconductor manufacturing

SPECIFICATIONS:

DETECTOR TYPE	Plasma Emission Detector design based on a Duty Cycle Controlled System
RANGE	0 – 1 ppm, resolution to 10 ppb 0 – 10 ppm, resolution to .1 ppm 0 – 100 ppm, resolution to 1 ppm other range possible up to 10000 ppm
ACCURACY	< 1% full scale
RESPONSE TIME	15S for 90% of a step change at 75sccm
REPEATABILITY	Better than $\pm 1\%$ full scale
STANDARD FEATURES	<ul style="list-style-type: none"> • Manual or autoranging (user selectable) • Microprocessor controlled • 5.6" TFT intelligent LCD module with Touch Screen • Self diagnosis system with auto-resolve alarm • LAN/Web control • 4-20 mA isolated output • Alarm Historic • Safe calibration procedure to avoid any bad calibration • Digital outputs for remote monitoring: (all dry relay contacts) <ul style="list-style-type: none"> - System status (1 output) - Range in use (3 output) - Calibration in use (1 output)
OPTIONS	<ul style="list-style-type: none"> • Internal sampling system for zero, span and sample with remote capabilities • Serial port: RS-232 / 422 / 485 / Profibus • 2 alarm outputs (user programmable set point) • Zero calibration gas free system
GAS CONNECTIONS	Sample: 1/8" compression fittings Vent: 1/8" compression fitting
CALIBRATION GAS	Zero: purified gas (Getter), or 0.5-2.0 ppm N ₂ /Ar Span: 8.0 to 9.5 ppm N ₂ /Ar
SAMPLE FLOW REQUIREMENTS	15 to 200 sccm-
FLOW ACCURACY	0 to 200 sccm $\pm 1\%$ full scale
MAX OPERATING PRESSURE	30 PSIG (207 kPAG)
MIN OPERATING PRESSURE	4 PSIG (28 kPAG) optional 1 PSIG (7 kPAG)
OPERATING TEMPERATURE	10 °C to 45 °C
SUPPLY	115 VAC, 50 – 60 Hz or 220 VAC, 50 – 60 Hz
POWER CONSUMPTION	Maximum 40 watts
DRIFT	< $\pm 1\%$ over 24 hours
WEIGHT	29 lbs (13 kg)

Specifications are subject to change without notice.